

## PLASMA CHARACTERISTICS IN SQUARE PULSE ARC DISCHARGE OF PLASMA CATHODE ELECTRON SOURCE DEVICE

### KARAKTERISTIK PULSA KOTAK PLASMA ARCH DISCHARGE DALAM PIRANTI SUMBER ELEKTRON KATODA PLASMA

Agus Purwadi, Bambang Siswanto, Wirjoadi, Lely Susita R.M., Sudjatmoko  
Center for Technology of Accelerator and Material Process, BATAN  
Jl. Babarsari P.O. Box 6101 Ykbb, Yogyakarta 55281  
e-mail : [agus.p@batan.go.id](mailto:agus.p@batan.go.id)

Received 02 July 2013, received in revised form 22 July 2013, accepted 29 July 2013

#### ABSTRACT

**PLASMA CHARACTERISTICS IN SQUARE PULSE ARC DISCHARGE OF PLASMA CATHODE ELECTRON SOURCE DEVICE.** Plasma parameters in Plasma Cathode Electron Source Device (PCESD) are very important things because they will determine the efficiency of its electron extraction. Square pulse mode of PCESD's arc discharge plasma current can be obtained by using Pulse Forming Network (PFN) circuits which is called Arc Discharge Power Supply (ADPS). The square pulse mode is necessity to simplify in electron irradiation dose calculation. ADPS is connected with Hollow Anode Chamber (HAC) which is placed inside of PCESD to produce arc discharge plasma. The value of arc discharge plasma current is the main key to determine plasma parameters that can be measured by using Rogowski coil. The value of the arc discharge plasma current is  $I_{ADPS} = 206.30$  A with pulse width  $\tau = 80$   $\mu$ s. Whereas the plasma parameters values inside of the HAC are: the electron plasma density  $n_e = (16.85 \times 10^{19})$   $m^{-3}$ , electron plasma temperature  $T_e = 2.609$  eV, electron plasma frequency  $f_e = 116.74$  GHz, and Debye length  $\lambda_D = 9.958$   $\mu$ m respectively.

Keywords : Arc discharge, plasma cathode, hollow anode, Rogowski coil, Debye length.

#### ABSTRAK

**KARAKTERISTIK PLASMA DALAM LUCUTAN BUSUR PULSA KOTAK DARI PIRANTI SUMBER ELEKTRON KATODA PLASMA.** Parameter plasma dalam Piranti Sumber Elektron Katoda Plasma (PSEKP) adalah sesuatu yang sangat penting karena akan menentukan efisiensi ekstraksi elektronnya. Bentuk pulsa kotak dari arus plasma lucutan arc PSEKP dapat diperoleh dengan menggunakan rangkaian Jaringan Pembentuk Pulsa (JPP) yang dinamakan Arc Discharge Power Supply (ADPS). Bentuk pulsa kotak sangatlah diperlukan untuk menyederhanakan dalam perhitungan dosis iradiasi elektron. ADPS dihubungkan dengan Bejana Anoda Berongga (BAB) yang terletak di dalam PSEKP untuk menghasilkan plasma lucutan busur. Besarnya arus plasma lucutan busur merupakan kunci utama untuk menentukan parameter plasma dan ini bisa diukur dengan menggunakan koil Rogowski. Besarnya arus plasma lucutan busur yang diperoleh adalah sebesar  $I_{ADPS} = 206,30$  A dengan lebar pulsa  $\tau = 80$   $\mu$ s. Sedang besar parameter plasma di dalam BAB masing-masing adalah: kerapatan plasma elektron  $n_e = (16,85 \times 10^{19})$   $m^{-3}$ , suhu plasma elektron  $T_e = 2,609$  eV, frekuensi plasma elektron  $f_e = 116,74$  GHz dan panjang Debye  $\lambda_D = 9,958$   $\mu$ m.

Kata kunci : Lucutan busur, katoda plasma, anoda berongga, koil Rogowski, panjang Debye.

#### INTRODUCTION

Large cross section electron beams are attractive for applications involving large plane objects or bulk media. They have found use in radiation technologies, in surface modification of structural materials, in pumping the

active media of gas lasers, and in other fields <sup>(1-3)</sup>. In Plasma Cathode Electron Sources, the production of beams of this type is accomplished by the extraction of electrons from the surface of volumetric plasma.

Plasma parameters in Plasma Cathode Electron Source Device (PCESD) are very important things because they will determine the efficiency of its electron extraction. For simplicity in electron dose irradiation, the square pulse mode is necessary. Plasma parameters in square pulse arc discharge of Hollow Anode Chamber (HAC) can be determined by using Rogowski coil (for measuring the electron plasma beams current) and voltage divider probe for measuring the high voltage pulse <sup>(4)</sup>.

HAC is placed inside of the Plasma Cathode Electron Source Device (PCESD). HAC is cylindrical shaped which made of SS 304 with its diameter of 4.00 cm and length of 48.75 cm as well as PCESD chamber is also cylindrical shaped, made of SS 304 with its diameter of 16.00 cm and length of 82.00 cm. There are igniter electrodes in the HAC which consist of the massive cylindrical cathode made of silver (Ag) material and cone shaped of anode made of SS 304 material and then between anode and cathode is separated by ring shaped isolator of teflon material. HAC (as an anode) and igniter cathode are separated by cylindrical shaped isolator of coprolon material.

Plasma is formed in the HAC after arising plasma spot on the silver (Ag) cathode surface of igniter electrode system due to the potential different from cathode (igniter electrode system) to the anode (HAC). The arising plasma spot is driven by 12 kV Ignitor Discharge Power Supply (IDPS), then this spot ignites plasma formation in the HAC which is driven by 1 kV Arc Discharge Power Supply (ADPS) <sup>(5)</sup>. The goal of this experiment is to determine the plasma parameters in the HAC, which are electron plasma density  $n_e$ , electron plasma temperature  $T_e$ , electron plasma frequency  $f_e$  and Debye length  $\lambda_D$ .

## METHODOLOGY

Photograph of the experiment device unit of Plasma Cathode Electron Source is shown in Fig. 1. The experiment is carried out by pressure of  $10^{-4}$  torr, the output voltage of IDPS is 12 kV and the ADPS output voltage is 1 kV.



FIG. 1. Photograph of the experiment device unit of Plasma Cathode Electron Source .

Schematic of HAC is displayed in Fig. 2. It is shown that negative pole of ADPS which is connected to IDPS cathode, the positive pole is connected to HAC (anode 2). HAC module has the igniter electrodes for

forming plasma spot. The igniter electrode materials of HAC use silver (Ag) as a cathode and SS 304 as an anode. The anode and cathode are separated by ring shaped isolator of teflon material while the HAC with igniter cathode is separated by cylindrical shaped isolator of coprolon material.

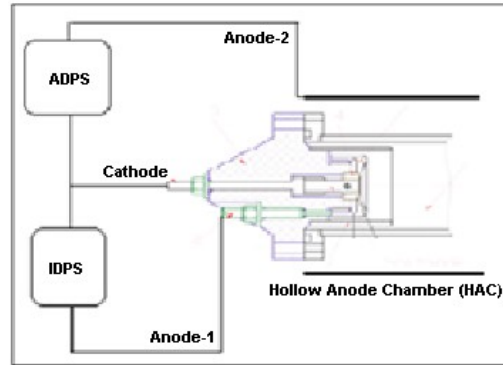


FIG. 2. Schematic of Hollow Anode Chamber (HAC)

Photograph of ADPS's Pulse Forming Network (PFN) circuits to form the square pulse mode of PCESD's arc discharge plasma current is shown in Fig. 3. PFN which consists of a 10 meshes of C-L circuits with 1  $\mu$ F/1.2 kV capacitance and 27  $\mu$ H inductance.

Photograph of the Rogowski coil with 80 winds for measuring the high beams current of arc discharge plasma is shown in Fig. 4, while the parameters of its apparatus is shown in Table 1.



FIG. 3. Photograph of ADPS's Pulse Forming Network (PFN) circuits

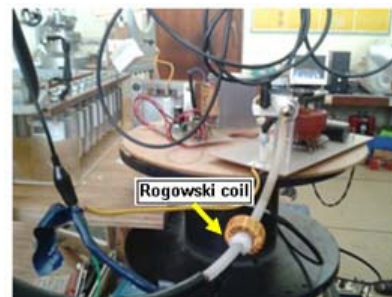


FIG. 4. Photograph of Rogowski Coil with 80 winds

Table 1. Parameters of Rogowski coil apparatus

No.	Parameter's Name	Simbol	Value (Unit)
1	Outer diameter	$\varnothing_{\text{luar}}$	28 mm = $28 \times 10^{-3}$ (m)

2	Inner diameter	$\varnothing_{\text{dalam}}$	14.24 mm = $14.24 \times 10^{-3}$ (m)
3	Middle diameter	$\varnothing_{\text{tengah}}$	21.12 mm = $21.12 \times 10^{-3}$ (m)
4	Toroid thickness	$t_t$	11 mm = $11 \times 10^{-3}$ (m)
5	Toroid width	$L_t$	6.88 mm = $6.88 \times 10^{-3}$ (m)
6	Toroid radius	$r_{\text{toroid}}$	10.56 mm = $10.56 \times 10^{-3}$ (m)
7	Wire diameter for wind	$\varnothing_{\text{kawat}}$	0.4 mm = $0.4 \times 10^{-3}$ (m)
8	Wire radius for wind	$r_t$	0.2 mm = $0.2 \times 10^{-3}$ (m)
9	Wind number	N	80 winds
10	Rogowski coil cross section	$A_{\text{wR}}$	75.68 mm = $75.68 \times 10^{-3}$ (m)
11	Relative permeability	$\mu_r$	93 Henry/Ampere
12	Air permeability	$\mu_0$	$4 \pi \times 10^{-7}$ Henry/Ampere

## RESULT AND DISCUSSION

Plasma spot in HAC occurs 1 mm in front of igniter electrodes surface and it is driven by IDPS voltage of 12 kV with tube pressure about of  $10^{-4}$  torr while the arc discharge plasma occurs inside of HAC and it is driven by ADPS voltage of 1 kV. The photograph of arc discharge plasma that occurs inside of HAC and electron beam supposed that emitted from one side of hole of HAC are shown in Fig. 5.




FIG. 5. Photograph of arc discharge plasma inside of the Hollow Anode Chamber (HAC)

The arc discharge plasma current is measured by using Rogowski coil. Photograph of arc discharge plasma current which is expressed in the form of square pulse of output voltage having pulse high of 10 V and pulse width of 80  $\mu$ sec is shown in Fig. 6.




FIG. 6. Photograph of the output voltage of Rogowski coil measurement.

The arc discharge current ( $I_{ADPS}$ ) is given by following formulation <sup>(6)</sup>:

$$I(t) = \frac{2 \pi a R C}{\mu_0 A n} V_0(t) \quad (1)$$

It is obtained the ADPS current  $I_{ADPS} = 206.30$  ampere (A) with the values of  $a$  = torus major radius =  $10.56 \times 10^{-3}$  m,  $R$  = integrator resistance = 100  $\Omega$ ,  $C$  = integrator capasitance =  $0.33 \times 10^{-6}$  F,  $V_0(t)$  = measured

voltage = 10 volt,  $\mu$  = permeability constant =  $\mu_0 \times \mu_r = 93 (4 \times 10^{-7}) \text{ Hm}^{-1}$ ,  $A$  = torus minor cross section =  $75.68 \times 10^{-6} \text{ m}^2$  and  $n$  = number of torus wind = 80 winds.

By using simulation it has been chosen that the optimum radius of plasma beam current is  $r = 3.00 \mu\text{m}$  so by substituting the optimum discharge plasma current  $I_{opt.} = 206.30 \text{ A}$  and  $r = 3.00 \mu\text{m}$  into formulation 2,

$$J_r = \frac{I_{opt}}{\pi r^2} \quad (2)$$

and it is obtained the value of plasma current density  $J_{(r:3\mu\text{m})} = 730 \times 10^8 \text{ A/cm}^2$ .

The total charge value of  $Q$  in the HAC is formulated by :

$$Q = I \tau \quad (3)$$

It is obtained the value of  $Q = 16.50 \times 10^{-3} \text{ coulomb (C)}$  with the plasma discharge current  $I = 206.30 \text{ A}$  and the  $\tau = 80 \mu\text{s}$ . Hence the total number of of electrons in the HAC the  $N \approx 10^{17}$  electrons  $1 \text{ C} = 6.25 \times 10^{18}$  electrons. The volume  $V$  of HAC is known by substituting its dimension of radius  $r = 2.00 \text{ cm}$  and the length  $l = 48.75 \text{ cm}$ . The plasma density in the HAC can be determined by:

$$n_e = \frac{N}{V} \quad (4)$$

The plasma density value is obtained  $n_e = (16.85 \times 10^{19}) \text{ m}^{-3}$ . Resulting  $n_e = (16.85 \times 10^{19}) \text{ m}^{-3}$  is still ten to hundred times higher than expected value. It is happened because the applied vacuum degree is still lower than expected, had not yet reached  $10^{-4} \text{ torr}$ .

Electron temperature  $T_e$  can be determined by using the relation <sup>(7)</sup> :

$$T_e = \frac{16 \pi m_e J_r^2}{8 e^2 n_e^2 k} \quad (5)$$

The value of electron temperature  $T_e$  can be calculated by using the value of plasma current density  $J_{(r:3\text{mm})} = 7.3 \times 10^6 \text{ A/m}^2$  and electron density  $n_e = (16.85 \times 10^{19}) \text{ m}^{-3}$  that have been determined before, and the other values of constant are known as  $m_e$  = electron mass =  $9.109 \times 10^{-31} \text{ kg}$ ,  $e$  = electron charge =  $(1.602 \times 10^{-19}) \text{ C}$ , and  $k$  = Boltzmann constant =  $1.381 \times 10^{-23} \text{ J/K}$ . It has been calculated that the value of plasma temperature  $T_e = (3.0269 \times 10^4) \text{ K} = 2.609 \text{ eV}$ . This temperature value has been in agreement with the expectation.

For ion plasma frequency  $f_i$  is not able to be calculated because the total ion charge  $Q_i$  and the ion plasma density  $n_i$  in the HAC has not yet been determined, while the electron plasma frequency  $f_e$  can be deduced by:

$$f_e = 8980 \sqrt{n_e} \quad (6)$$

The electron frequency depends on the electron density  $n_e$  (in  $\text{cm}^{-3}$  unit) that has been determined  $n_e = (16.85 \times 10^{13}) \text{ cm}^{-3}$ , and it has been calculated by using Eq. (6) that the obtained value of electron plasma frequency is  $f_e = 116,740 \times 10^6 \text{ Hz} = 116.74 \text{ GHz}$ . This frequency value is on the range of micro wave band (several of Giga Hertz).

By using the values of electron plasma temperature  $T_e = (3.0269 \times 10^4) \text{ K}$  and electron plasma density  $n_e = (16.85 \times 10^{19}) \text{ m}^{-3}$  that have been determined and by substituting both of them:

$$\lambda_D^2 = \frac{\epsilon_0 k T_e}{e^2 n_e} \quad \text{or} \quad \lambda_D = 743 \sqrt{\frac{T_e}{n_e}} \quad (7)$$

the value of Debye length can be obtained i.e.  $\lambda_D = (995.836 \times 10^{-8}) \text{ m} = 9.958 \mu\text{m}$ .

## CONCLUSION

Based on the characterization discussion as described above can be concluded as follows. The plasma parameters determination in the HAC of SS 304 cylinder shaped with 2.00 cm radius and 48.75 cm length has been done. It is carried out on vacuum pressure about of  $10^{-4}$  torr, igniter output voltage of 12 kV on IDPS and 1 kV on ADPS to produce arc discharge plasma. The arc discharge plasma current  $I_{ADPS} = 206.30$  amper (A) was obtained by using Rogowski coil as measurement device. The values of plasma parameters inside of the HAC are: the electron plasma density  $n_e = (16.85 \times 10^{19}) \text{ m}^{-3}$ , electron plasma temperature  $T_e = (3.0269 \times 10^4) \text{ K} = 2.609 \text{ eV}$ , electron plasma frequency  $f_e = 116,740 \times 10^6 \text{ Hz} = 116.74 \text{ GHz}$  and Debye length  $\lambda_D = (995.836 \times 10^{-8}) \text{ m} = 9.958 \text{ }\mu\text{m}$  respectively. The value of electron plasma density  $n_e = (16.85 \times 10^{19}) \text{ m}^{-3}$  is still ten to hundred times higher than expected value. It happened because the applied vacuum degree is still lower than expected, that had not yet reached  $10^{-4}$  torr.

## ACKNOWLEDGMENTS

The authors thank Drs. Widdi Usada, Drs. Aminus Salam, Drs. Budi Santosa, MT., Saefurrochman, ST, Ihwanul Azis, A.Md., Heri Sudarmanto and Untung Margono for their expert technical assistance and gratefully acknowledge valuable the theory of plasma cathode electron source from Prof. Efim Oks. The research was jointly supported by Project A of PTAPB-BATAN.

## LITERATURES

- Y.E. KRASIK, D. YARMOLICH, J.Z. GLEIZER, V. VEKSELMAN, Y. HADAS, V.T. GUROVICH, and J. FELSTEINER, *Physics of Plasmas* 16, 057103 (2009) 057103-1 – 057103-11
- J.Z. GLEIZER, Y. HADAS, V.T. GUROVICH, J. FELSTEINER, and Y.E. KRASIK, *Journal of Applied Physics* 103, 043302 (2008) 043302-1 – 043302-11
- J.Z. GLEIZER, V. VEKSELMAN, S. YATOM, J. FELSTEINER, and Y.E. KRASIK, *Radiation Effects & Defects in Solids*, iFirst, (2011) 1-10
- R.H. HUDDLESTONE and S.N. LEONARD, *Plasma Diagnostic Techniques*, Academic Press, New York, (1995) 113-117
- EFIM OKS, *Lecture 8 Introduction of Plasma Cathode Electron Source*, presented in BATAN Accelerator School, Yogyakarta, Indonesia, 5<sup>th</sup> - 9<sup>th</sup> December (2011)
- AGUS PURWADI, WIDDI USADA, *Rancang Bangun Spark Gap Saklar Sumber Elektron Berbasis Plasma dan Metoda Penentuan Besar Arus Berkas Pulsanya*, Prosiding PPI Litdas Iptek Nuklir, PTAPB-BATAN Yogyakarta, Indonesia. 20<sup>th</sup> July (2010)
- EFIM OKS, *Plasma Cathode Electron Source*, Physics, Technology, Applications, Institute of High Current Electronics (IHCE), Russian Academy of Sciences, 2/3 Akademichisky Ave, 634055 Tomsk, Russia, (2006)